

Search Space Contraction in Canonical Labeling of Graphs (Preliminary Version)

Adolfo Piperno

Dipartimento di Informatica, Università di Roma La Sapienza
Via Salaria 113, I-00198 Roma
piperno@di.uniroma1.it

April 30, 2008

Abstract

The individualization-refinement paradigm for computing a canonical labeling and/or the automorphism group of a graph is investigated. New techniques are introduced with the aim of reducing the size of the associated search space. In particular, a new partition refinement algorithm is proposed, together with graph invariants having a global nature. Experimental results and comparisons with existing tools, such as *nauty*, reveal that the presented approach produces a huge contraction of the search space. Such reduction will be shown to be exponential for special classes of graphs which are intractable by *nauty*.

1 Introduction

When we consider the literature about methods for approaching the graph isomorphism problem (GI) or the related problem of canonical labeling of graphs, a peculiar panorama appears.

From the theoretical side, besides papers substantiating the thesis that GI is not NP-complete [20, 26] (a survey is in [1]), there is a huge amount of notable pieces of mathematics showing the existence of polynomial solutions of GI, for significant classes of graphs. While moderately exponential solutions have been provided for the general problem of graph isomorphism [3, 6], polynomial algorithms exist for planar graphs [12, 13], graph of bounded genus [10], graphs with colored vertices and bounded color-classes [2], graphs with bounded multiplicity of eigenvalues [5], graphs of bounded valence [18], and more (see [4]).

From the practical side, there are some notable pieces of software, which originate from the outstanding tool *nauty* [21]. *nauty* was introduced in the 80's by McKay [22]; it has become a standard in the area of canonical labeling and detection of the automorphism group of a graph; moreover, it has been incorporated into more general mathematical software tools such as GAP [11] and MAGMA [19].

It is important to observe that none of the polynomial algorithms, mentioned above, has been implemented in software, as noted by Junttila and Kaski in [15]. A reasonable justification for this absence seems to be that, usually, given a class $\mathbb{C}$ of graphs for which an efficient algorithm for isomorphism testing exists, *nauty* is able to treat almost all the graphs of $\mathbb{C}$, still remaining (considerably, indeed) below the theoretically established bound. However, there might exist subsets of $\mathbb{C}$ for which *nauty* exhibits an exponential behavior, as it results from the series of graphs constructed by Miyazaki in [23]: all these graphs are 3-regular and have color-class size

equal to 4, hence they intersect two classes of graphs for which polynomial solutions for GI exist. A further weird feature of Miyazaki’s graphs is that the size of their automorphism group is quite large, such size increasing with that of graphs. This contrasts with the general agreement that hard graphs for *nauty* have a high degree of regularity but a small automorphism group.

In recent years, the tools *saucy* [9, 8] and *bliss* [15, 14] have been introduced, with the aim of handling large and sparse graphs coming either from the satisfiability problem (SAT) or from industrial applications. As well as *nauty*, these are general purpose devices implementing backtrack algorithms based on the so called individualization-refinement technique and, though similar in nature, they differ from each other for the used data structures and heuristics ⁽¹⁾.

The motivation of the present paper is in some sense orthogonal to that of *saucy* and *bliss*; while they provide more efficient data structures (some of them already adopted by the newest release of *nauty*) and heuristics to be placed into the precise structure of *nauty*, we start our investigation from the analysis of some critical features of the refinement-individualization paradigm and we propose new solutions and a new algorithmic design. Our reference graphs are not large and sparse graphs with large automorphism groups, but rather all the known hard graphs for *nauty*, such as graphs built from Hadamard matrices, graphs coming from projective planes, other graphs of combinatorial origin and, obviously, Miyazaki’s graphs. The aim is to make the computation for all these graphs feasible; the price we are ready to pay for this is just a reasonable loss of efficiency in the cases of “easy” graphs.

The complexity of a tool based on the individualization-refinement technique essentially comes out from the size of the associated search space, usually implemented as a tree, and from the complexity of the refinement function (which is invoked once for every node of the search tree). On its hand, the behavior of the refinement procedure affects the size of the search tree, as *nauty*’s vertex-invariants show. However, the choice of the correct invariant is left by *nauty* to the user, since the usefulness of one of them strictly depends on the input graph: in some sense, the adoption of a vertex invariant deviates from the initial assumption of a general purpose tool.

Our aim is to propose a new approach in connection with three primary issues of the individualization-refinement paradigm for canonical labeling of graphs: the size and depth of the search tree, the refinement procedure, the selector of the next individualization step. We suggest a different structure for the refinement procedure, which will be called *multi-refinement*, whose corresponding invariant is not based on local properties of vertices of the graph (such as adjacencies, incident cliques and others): two vertices will be considered equivalent (and therefore assigned to the same color class) when their individualizations induce (after refinement) equivalent partitions. This enables to reduce the depth of the search tree, obtaining finer partitions, and authorizes new criteria for selecting the color class of the next individualized vertices, in our case the one producing the partition with maximal size.

Our multi-refinement is computationally much heavier than usual refinement. In the worst case, we could be losing a factor of n (the number of vertices of the considered graph) in time, when the refinements of all vertex individualizations are needed to produce the multi-refinement. However, from one hand some techniques will be introduced in order to manage the required refinements without computing them completely, including the use of information coming from the automorphism group of the graph and a new representation of the whole refinement process. From the other hand, multi-refinement naturally suggests its parallel execution, though this is outside the scope of the present paper.

¹We briefly recall here that the key of the individualization-refinement technique is the notion of *equitable partition*, a coloring of vertices of a graph such that any two vertices with the same color have the same amount of neighbors in each color class; this induces an equivalence relation. A vertex is *individualized* by assigning to it a fresh color, the so obtained coloring is *refined* when a new equitable partition (finer than the initial one) is produced.

On the positive side, multi-refinement will cause a considerable reduction of the size of the search tree: in particular, such decrease will be shown to be dramatic when very large search trees are needed by *nauty* and other tools; as an example, an exponential reduction of the size of the search tree will come out for Miyazaki’s sequence of graphs. In all cases, multi-refinement, combined with the associated selector of the next individualization step, causes the reduction of the depth of the search tree. We observe that the contraction of one level of the search tree often pays back, in terms of time, the loss caused by multi-refinement.

Within the mentioned motivations, we will introduce a tool named *Traces*, whose main contributions can be summarized as follows: *Traces* either computes a canonical form for a colored graph or a set of generators for its automorphism group; in the latter case, a method is defined and implemented, which can be applied to check isomorphism between two graphs G_1 and G_2 without considering $G_1 \cup G_2^{(2)}$, with the motivation of speeding-up the computation of the automorphism group in the case of “hard” graphs. *Traces* does not use backtrack to traverse the search space; at the implementation level, the latter is not even treated as a tree, though, for expository reasons, we will still refer to it as the *search tree*. In *Traces*, the next individualization step is chosen during the refinement procedure as the one which maximizes the size of the partition which will come *after* it, in order to define an individualization selector which does not leave vertices of the graph unconsidered as individualized ones. The refinement procedure of *Traces* produces a partition such that, for any cell W , the usual individualization and refinement of all elements of W induce the same quotient graph; moreover, partitions are compared (and possibly discarded) without computing them completely, using a linear representation which we will call *trace*. Detected automorphisms are manipulated in *Traces* by means of the Schreier-Sims algorithm [28] (see also [27]); information on the group structure is also used by the refinement procedure to eliminate redundant computations.

The choice of Schreier-Sims algorithm is due to the fact that it allows, by automorphism detection, the highest range of pruning of the search tree (see [16]), which is the main concern of this paper. Leon’s implementation [17] of the Schreier-Sims algorithm is integrated in *Traces*: such code is extremely efficient in the case of graphs which do not exhibit a very large automorphism group, those we are mainly interested in. We will point out the cases where the use of the Schreier-Sims algorithm heavily affects the whole computation.

We will produce results and performance tables using fragments of the huge catalogue of benchmark graphs for canonical labeling and automorphism group computation compiled by Junttila and Kaski [15]. In order to give an anticipation of our results and a final account on our motivations, we report some experiments, taken from Tables 1 and 2 and executed on an Apple Mac Pro with 2 Quad Core processors at 2.8 GHz:

- **pp-16-9** is a (546 vertices, 4641 edges) graph associated to one of the known projective planes of order 16 (see [25]): *bliss*, which is considerably faster than *nauty* on this graph, takes approximately one hour to canonize it, traversing more than 300 million nodes of the search tree, which has depth 6; *Traces* reduces the depth of the search tree down to 3 and traverses 187 nodes, only, in 0.39 seconds; the time spent in group computation is in this case negligible; the size of the automorphism group of the graph is 921, 600;
- **had-100** is a (400, 20200) graph associated to a 100×100 Hadamard matrix (see [29]): *bliss* takes 4.23 seconds to canonize **had-100**, traversing more than 50,000 nodes of the search tree, which has depth 5; *Traces* reduces the depth of the search tree down to 2 and traverses 725 nodes in 3, 20 seconds; the time spent in group computation is in this case negligible, too; the size of the automorphism group of the graph is 400;

²Recall that Mathon’s proof [20] of the equivalence between the graph isomorphism problem for G_1 and G_2 and the problem of computing generators of the automorphism group of a graph requires the computation of the automorphism group of $G_1 \cup G_2$.

- while canonizing a complete graph, *Traces* spends almost all the time in group computation;
- the sequence of graphs *mz-aug2-2x* derives from Miyazaki's construction; *bliss* traverses more than 1 million nodes to canonize *mz-aug2-18* (a (432, 684) graph), more than 4 million nodes to canonize *mz-aug2-20* (a (480, 760) graph), more than 16 million nodes to canonize *mz-aug2-22* (a (528, 836) graph), and so on. On its hand, *Traces* traverses 145 nodes to canonize *mz-aug2-18*, 161 nodes to canonize *mz-aug2-20*, 177 nodes to canonize *mz-aug2-22*, a linear sequence.

These are prototypical cases. They show that the difference in performance between *Traces* and other tools for canonical labeling of graphs is located in the ability to prune the search space. When, as in the first case, the ratio between sizes of the search spaces is substantial, then *Traces* runs much faster than other tools; otherwise, their timings are comparable, modulo the time spent in the group-related computations. *Traces* is slower than other tools when the associated search spaces are very small, usually when the input graph has a low degree of regularity or a high degree of symmetry. Even better results will be shown in the case of automorphism group computation instead of canonical labeling.

1.1 Structure of the paper

In the next section, some properties of graphs and partitions will be introduced; the individualization-refinement technique will be described in section 2.1. Section 3 is dedicated to the presentation of the tool *Traces*, which implements our approach to canonical labeling of graphs. In particular, the multi-refinement operation will be defined, together with techniques for comparing partitions and choosing the next individualization step (section 3.1) and the strategy for traversing the associated search space (section 3.2); the method for computing the automorphism group of a graph will be presented in section 3.3. Experimental results are presented and commented in section 4, in relation to *nauty* and *bliss*. A brief discussion and suggestions for further work conclude the paper.

2 Graphs and partitions

A (labeled simple) *graph* is a pair (V, E) , where V is a finite set of *vertices* and E is a set of unordered pairs of vertices called *edges*. If $(u, v) \in E$, we say that v and w are *adjacent* or *neighbors*. A (vertex) *colored graph* is a pair $G = (H, \chi)$, where H is a graph and χ is a function assigning colors to vertices of H . A more precise definition of the coloring function will be given in (1).

In this paper, $[n]$ will denote the set $\{1, \dots, n\}$, while $\mathbb{G}_{[n]}$ will denote the set of colored graphs with vertex set $[n]$. The whole set of colored graphs will be denoted by $\mathbb{G}$. Note that any graph is a colored graph in which all vertices have the same color.

Isomorphisms of graphs in $\mathbb{G}_{[n]}$ are permutations of $\{1, \dots, n\}$ preserving adjacency as well as non adjacency. When considering graphs with colored vertices, isomorphisms must preserve colors, too. We will write $G_1 \simeq G_2$ when G_1 and G_2 are isomorphic. An *automorphism* is an isomorphism between a graph and itself. The *automorphism group* $\text{Aut}(G)$ of a graph G is the set of all automorphisms of G with permutation composition as group operation.

Definition 2.1 (Invariant, canonical form).

1. An (*isomorphism*) *invariant* on $\mathbb{G}$ is a function f from $\mathbb{G}$ to a set $\mathbb{D}$ such that

$$G_1 \simeq G_2 \Rightarrow f(G_1) = f(G_2).$$

2. A function $\mathcal{C} : \mathbb{G} \rightarrow \mathbb{G}$ is a *canonical form* iff

- (i) $\forall G \in \mathbb{G} : \mathcal{C}(G) \simeq G;$
- (ii) $\forall G_1, G_2 \in \mathbb{G} : G_1 \simeq G_2 \Leftrightarrow \mathcal{C}(G_1) = \mathcal{C}(G_2).$

Definition 2.2 (Ordered partition). An *ordered partition* of $[n]$ is a sequence $\pi = (W_1, \dots, W_r)$ of disjoint non-empty subsets of $[n]$, called *cells*, whose union is $[n]$. The set of ordered partitions of $[n]$ will be denoted by $\Pi_{[n]}$, while Π will denote the set of all ordered partitions.

A cell of a partition $\pi \in \Pi_{[n]}$ is *trivial* when it contains only one element. The partition π is *discrete* if all its cells are trivial; π is the *unit partition* when it is constituted by only one cell, i.e. $\pi = ([n])$. For any $\pi \in \Pi_{[n]}$ and $v, w \in [n]$, we will write $v \sim_\pi w$ when v and w belong to the same cell of π .

Definition 2.3 (Index, position).

1. The *index* $ind(v, \pi)$ of a vertex $v \in [n]$ in an ordered partition $\pi \in \Pi_{[n]}$ is the index of the cell of π in which v appears, namely $ind(v, (W_1, \dots, W_r)) = k$ when $v \in W_k$.
2. The *position* of a node $v \in [n]$ in an ordered partition $\pi \in \Pi_{[n]}$ is defined by means of the function $pos : [n] \times \Pi_{[n]} \rightarrow [n]$ such that

$$ind(v, (W_1, \dots, W_r)) = k \Rightarrow pos(v, (W_1, \dots, W_r)) = 1 + \sum_{i=1}^{k-1} |W_i|.$$

3. The position of a cell W in an ordered partition π is defined as the position of an element of W in π (indeed, all the elements of W share the same position in π); with some overloading:

$$pos(W, \pi) = pos(v, \pi), \text{ for any } v \in W.$$

As an example, if $\pi = (\{2, 3\}, \{5\}, \{1, 4\}) \in \Pi_{[5]}$, then

$$\begin{aligned} pos(2, \pi) &= pos(3, \pi) = 1 = pos(\{2, 3\}, \pi) \\ pos(5, \pi) &= 3 = pos(\{5\}, \pi) \\ pos(1, \pi) &= pos(4, \pi) = 4 = pos(\{1, 4\}, \pi) \end{aligned}$$

In particular, $pos(v, ([n])) = 1$, for any $v \in [n]$.

Definition 2.4. Let $\preceq = \bigcup_n \preceq_n$, where the relation $\preceq_n (\subseteq \Pi_{[n]} \times \Pi_{[n]})$ is defined as follows:

$$\pi_1 \preceq_n \pi_2 \Leftrightarrow \forall v \in [n] : pos(v, \pi_1) \geq pos(v, \pi_2).$$

If, $\pi_1 \preceq \pi_2$, we say that π_1 is *finer* than π_2 (and that π_2 is *coarser* than π_1).

Let $\pi \in \Pi_{[n]}$ and let $(\chi_1, \dots, \chi_n)$ be a sequence of colors. The graph $G = ([n], E, \pi)$ is a colored graph if we interpret the partition π as a function assigning the $pos(v, \pi)$ -th color $\chi_{pos(v, \pi)}$ to the vertex v of G . Up to renaming of colors, the converse is also true. Therefore in the rest of the paper we will assume a colored graph to be a pair

$$G = ([n], E, \pi), \tag{1}$$

where π is an ordered partition of $[n]$. Note that, with the present assumption, the ordered partition π induces an ordering over colors of the graph G .

2.1 The individualization-refinement technique for canonical labeling

In this section, the behavior of the individualization-refinement technique for canonical labeling is revisited.

Definition 2.5 (Individualization). Let $\pi = (W_1, \dots, W_r) \in \Pi_{[n]}$ be a partition of $[n]$. For any $v \in [n]$, if v belongs to a not trivial cell W_i , then we denote by $\pi \downarrow v$ the partition obtained from π by splitting the cell W_i into the cells $\{v\}$ and $W_i - \{v\}$, namely

$$\pi \downarrow v = (W_1, \dots, W_{i-1}, \{v\}, W_i - \{v\}, W_{i+1}, \dots, W_r), \text{ if } v \in W_i.$$

If $G = ([n], E, \pi) \in \mathbb{G}_{[n]}$, then we say that $G' = ([n], E, \pi \downarrow v)$ is obtained from G by *individualizing* the vertex v .

Note that

$$\text{pos}(w, \pi \downarrow v) = \begin{cases} \text{pos}(w, \pi) + 1 & \text{if } w \in W_i - \{v\}, \\ \text{pos}(w, \pi) & \text{otherwise.} \end{cases}$$

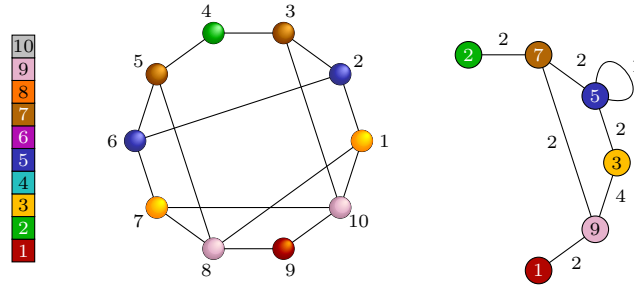


Figure 1: An equitable graph and its quotient. Here $\pi = (\{9\}, \{4\}, \{1, 7\}, \{2, 6\}, \{3, 5\}, \{8, 10\})$.

Definition 2.6 (Equitable graph). Let $G = ((V, E), \pi) \in \mathbb{G}$ be a colored graph. We say that G is *equitable* when for every cell W of π and for any two vertices $v, w \in W$, v and w have an equal number of neighbors in each cell of π .

Definition 2.7 (Quotient graph). Let $G = ((V, E), \pi) \in \mathbb{G}$ be an equitable graph. The *quotient graph* of G , notation $Q(G) = (V', E')$, is a graph, with possible multiple edges and loops, having vertex set $V' = \{\text{pos}(v, \pi) \mid v \in V\}$ and edge multiset $E' = \{\{(\text{pos}(v, \pi), \text{pos}(w, \pi)) \mid (v, w) \in E\}$.

Figure 1 shows an equitable graph G and its quotient graph. For every color appearing in G , there exists a corresponding vertex in $Q(G)$; an edge in $Q(G)$ has multiplicity k if G has k edges joining vertices with the corresponding colors. Observe that, if we ignore edge multiplicities and loops, then the quotient graph $Q(G)$ is isomorphic to a subgraph of the graph G ⁽³⁾. Clearly, when the coloring partition π is discrete, then $Q(G)$ is isomorphic to the graph G itself.

Definition 2.8 (Refinement). Let $G = (H, \pi) \in \mathbb{G}$. A *refinement* of G is a function $R : \mathbb{G} \rightarrow \mathbb{G}$ such that: (i) ${}^{(4)}R(H, \pi) = (H, \pi')$ is an equitable graph with $\pi' \preceq \pi$; (ii) R preserves isomorphisms, i.e. $(H_1, \pi_1) \simeq (H_2, \pi_2) \Rightarrow R(H_1, \pi_1) \simeq R(H_2, \pi_2)$.

³In the case of singleton vertices, this enables the *partial leaf certificate* of [15].

⁴By abuse of notation, while considering, for some $\mathbb{W}$, a function $F : \mathbb{G} \rightarrow \mathbb{W}$, we will write $F(H, \pi)$ instead of $F([n], E, \pi)$ in order to avoid duplicated parentheses.

The refinement procedures implemented in *nauty*, *saucy* and *bliss* can be briefly described as follows: using a specific scheduling, which is isomorphism invariant, cells of π are visited. For each visited cell W , the multiplicities of adjacencies of elements of W are counted. For any cell Z , the elements of Z are rearranged according to these values, and Z is split into the cells $Z_1, \dots, Z_k$ such that all the elements of Z_i have the same amount of neighbors in W . This process is repeated until the graph is equitable.

Definition 2.9 (Target cell). Let $G = (H, \pi) \in \mathbb{G}$. A *target cell (selector)* of G is a function $T : \mathbb{G} \rightarrow [n]$ such that: (i) $T(H, \pi) = k$ is the position of a cell of π ; (ii) T is an isomorphism invariant, i.e. $(H_1, \pi_1) \simeq (H_2, \pi_2) \Rightarrow T(H_1, \pi_1) = T(H_2, \pi_2)$.

The target cell selector used in *nauty*, *saucy* and *bliss* has a static nature: cells are classified according to the presence of edges and non-edges wrt other cells. The leftmost cell having the highest value in such classification is chosen as the target cell.

The target cell selector of the present tool has a dynamic nature and is embodied into the refinement procedure, which will be presented in Section 3. Prior to its definition, a brief description of the behavior of algorithms for graph canonization based on the individualization-refinement scheme is needed.

Notation 2.10. Given an equitable graph $G(H, \pi)$ and a vertex v of H , we will write $(H, \pi^{(v)})$ as a shorthand for the refinement of the graph obtained by individualizing v :

$$(H, \pi^{(v)}) = R(H, \pi \downarrow v).$$

The *search tree* of an equitable graph $G = (H, \pi)$ is a labeled tree $\mathcal{T}(H, \pi)$ such that

- the root of $\mathcal{T}(H, \pi)$ has label π ;
- if π is discrete, then the tree rooted at it consists of that single node;
- otherwise, let $\pi = (W_1, \dots, W_i, \dots, W_k)$ and let $W_i = \{v_1, \dots, v_h\}$ be the target cell of (H, π) . Then the tree rooted at π has as children the trees $\mathcal{T}(H, \pi^{(v_1)}), \dots, \mathcal{T}(H, \pi^{(v_h)})$ and, for $i = 1, \dots, h$, the edge joining π with $\mathcal{T}(H, \pi^{(v_i)})$ has label v_i .

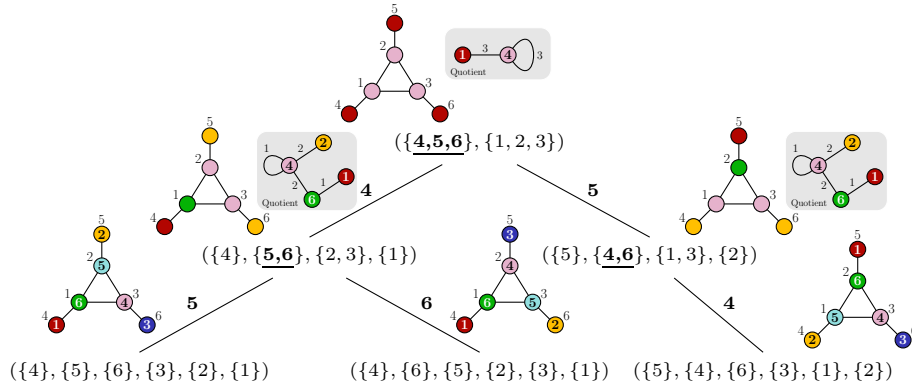


Figure 2: The pruned search tree; at the leaves, graphs and their quotients coincide

The typical behavior of algorithms based on the individualization-refinement mechanism is exemplified by the backtrack search in Figure 2, which is borrowed from *nauty*'s user guide [21].

Given an equitable colored graph $G = (H, \pi)$, the root of the tree is labeled by the partition π . The target cell is here the underlined one, namely $\{4, 5, 6\}$. Any node of the tree is labeled by an

equitable partition which is obtained by its father by individualizing each vertex in the target cell and then refining the obtained partition. The individualized vertices appear as edge labels in the tree. When the leftmost leaf is reached, the corresponding quotient graph is stored as a potential canonical form C_G for G . When the next leaf is reached, its corresponding quotient graph C'_G is compared with C_G . If they are equal, an automorphism of G has been found. Otherwise, C'_G is either discarded or it substitutes C_G if it is “better” according to some predefined ordering. Only part of the whole backtrack tree is actually generated. The other parts of the tree are either shown to be equivalent to parts already generated, or are pruned by means of invariant information discovered while traversing the tree itself. As an example, in Figure 2, the vertex 6, which belongs to the target cell of the root, is not individualized, since the first two visited leaves identify the permutation $(2, 3)(5, 6)$ as an automorphism of G . This implies that the tree obtained by individualizing the vertex 6 is isomorphic to the one individualizing the vertex 5: therefore it does not carry any additional information.

3 Introducing *Traces*

We start by introducing the refinement procedure of *Traces*, which is based on the following notion:

Definition 3.1. Given $G = (H, \pi) \in \mathbb{G}$, the partition π *respects node individualizations* when, for every pair of vertices v and w of G ,

$$v \sim_{\pi} w \Rightarrow Q(H, \pi^{(v)}) = Q(H, \pi^{(w)}),$$

i.e., if v and w belong to the same cell of π , then the refinements of their individualizations induce the same quotient graph.

Definition 3.2 (Multi-refinement). A *multi-refinement* is any refinement $R : \mathbb{G} \rightarrow \mathbb{G}$ such that

$$R(H, \pi) = (H, \pi') \text{ where } \pi' \text{ respects node individualizations.}$$

Traces uses the multi-refinement procedure defined by Algorithm 1. Starting from the equitable partition π , and for any cell W of π , vertex individualizations (followed by refinements) of elements of W are computed. We obtain quotient graphs and we lexicographically order them; the cell W is split (if possible) according to such ordering. This process is repeated until no further splitting can be produced. If the individualizations-refinements of the elements of a subset W' of W give discrete partitions, then the value of $R(H, \pi)$ is directly produced by taking the discrete partition which gives the lexicographically smallest quotient graph. Note that any discrete partition vacuously respects individualizations.

Remark 3.3. (i) If we replace, in the statement marked by $(\star)$ of Algorithm 1, the function call REFINE by MULTIREFINE, then we obtain a recursive algorithm which computes the orbit coloring of the input graph;

(ii) for each orbit of the automorphism subgroup computed so far, only one vertex is individualized; singleton cells are obviously not considered for individualization; when some new automorphism is found, it is added as a new generator for the automorphism group of the input graph; the new orbits of graphs coming from individualizations are computed as those of the stabilizers of the individualized vertices. All these group computations are made possible in *Traces* using Leon’s implementation [17] of the Schreier-Sims algorithm [28, 27];

(iii) multi-refinements allow for decreasing the depth of the search tree: from one hand, when they produce finer partitions wrt simple refinements; from the other hand, when they reach

Algorithm 1 Multi-refinement

MULTIREFINE(H, π)**Input:** $(H, \pi) \in \mathbb{G}$ and $S \subseteq \text{Aut}(H, \pi)$

```
repeat
{
  let  $(H, (W_1, \dots, W_k)) = \text{REFINE}(H, \pi)$ 
  let  $\Omega$  = set of representants of orbits of  $S$ 
   $i = 1$ 
   $discrete = \text{FALSE}$ 
   $split = \text{FALSE}$ 
  while  $(i \leq k)$  do
    if  $(|W_i| > 1)$  then
      {
        for  $(w \in W_i \cap \Omega)$  do
          {
             $p[w] = \pi'$  such that  $\text{REFINE}(H, \text{INDIVIDUALIZE}(\pi, w)) = (H, \pi')$  (★)
            if  $(p[w]$  is discrete) then
               $discrete = \text{TRUE}$ 
          }
        }
        if  $(discrete)$  then
          {
            CHECK FOR AUTOMORPHISMS between elements of  $p$  and update  $S$ 
            return  $(H, \hat{\pi})$  where  $\hat{\pi}$  is the discrete partition in  $p$  which induces
              the lexicographically smallest quotient graph
          }
        }
      else
        {
          SPLIT (if possible) the cell  $W_i$  into  $W_{i,1}, \dots, W_{i,h}$  according to the ordering
            of the quotient graphs induced by elements of the array  $p$ 
          if  $(W_i$  has been split) then
            {
               $\pi = (W_1, \dots, W_{i-1}, W_{i,1}, \dots, W_{i,h}, W_{i+1}, \dots, W_k)$ 
               $split = \text{TRUE}$ 
              break the while loop
            }
          }
        }
      }
    }
     $i = i + 1$ 
  }
}
until (not  $split$ )
return  $(H, \pi)$ 
```

a discrete partition while individualizing some vertex, thus adopting it as their result; it is important to note that such choice is isomorphism invariant;
(iv) in splitting a cell, quotient graphs are evaluated for comparing partitions. A method allowing to differentiate partitions without computing them completely will be presented in section 3.1.

As a general remark about the nature of multi-refinements, we observe that, being based on equivalence classes of refinements of all possible individualizations, they carry out information about the whole graph. This is a clear difference with respect to vertex invariants, which have an essentially local character.

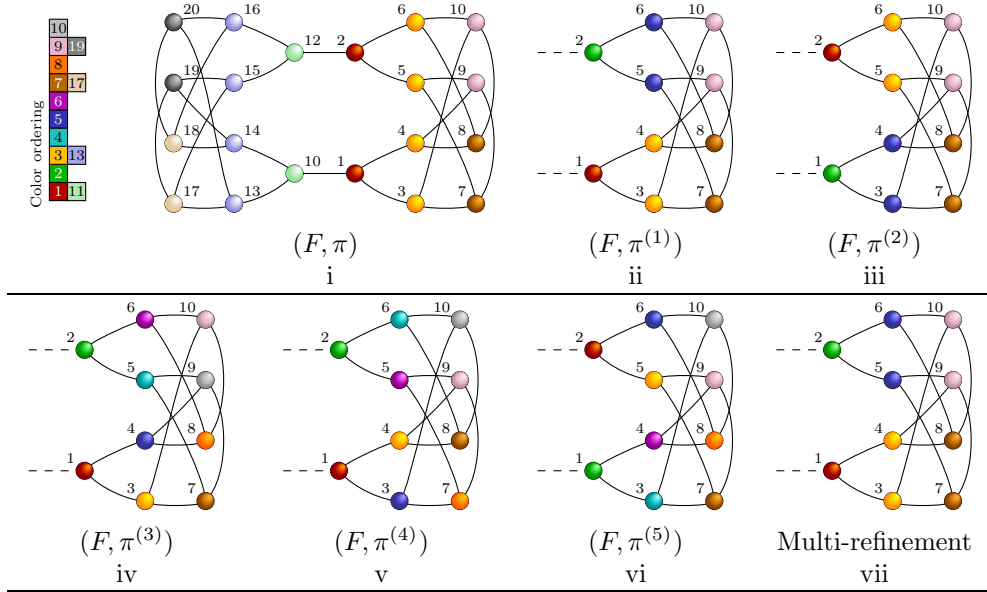


Figure 3: Multi-refining the Fürer gadget in the first Miyazaki's graph

In order to give a flavor of the behavior of the multi-refinement procedure, and to realize that Miyazaki's construction is not critical for *Traces*, we show in Figure 3 the simplest graph in Miyazaki's series. The graph and its coloring appear in Figure 3.i. We focus on the right part of the graph, only. For this graph F , first introduced by Fürer (see [7]), we show the refinements obtained after individualization of the vertices 1 to 5, in Figure 3.ii to vi, respectively. It comes out that $(F, \pi^{(1)})$ and $(F, \pi^{(2)})$ have the same quotient graph, as well as $(F, \pi^{(3)})$ and $(F, \pi^{(4)})$. $Q(F, \pi^{(4)})$, the quotient graph of $(F, \pi^{(4)})$, however, is different from $Q(F, \pi^{(5)})$, since the vertex 9 has the same color in both graphs, but different colors for neighbors. Therefore, the cell $\{3, 4, 5, 6\}$ is split, and this also causes the splitting of the cell $\{1, 2\}$. The multi-refined graph is reported in Figure 3.vii. Any cell will produce at the next step a discrete partition after the individualization of its vertices, for this fragment of the whole graph. We conclude this section observing that for any colored graph in Miyazaki's sequence [23], the initial multi-refinement is able to produce the orbit partition.

3.1 Comparing refinements and multi-refinements

The quotient graph of a refined graph is an isomorphism invariant of $\mathbb{G}$, otherwise contradicting (ii) of Def.2.8. Therefore, given colored graphs $G_1 = (H_1, \pi_1)$ and $G_2 = (H_2, \pi_2)$, we have been

allowed (in Algorithm 1) to classify their refinements by comparing the induced quotient graphs $Q(R(G_1))$ and $Q(R(G_2))$. If they are different, then there is no isomorphism between G_1 and G_2 . In particular, if G_1 and G_2 are different colorings of the same graph H , during the search for a canonical form of H we can discard either G_1 or G_2 according to a predefined ordering on quotient graphs, e.g. the lexicographic one.

However, refinements can be compared without computing them completely. This has been already observed by Junttila and Kaski in [15] in the case of singleton cells emerging during the refinement process (the consequent invariant is called *partial leaf certificate*, and is adopted in *Traces*, too). In addition to this, we introduce and implement a different invariant which we will name *refinement trace*.

Assume that the cell W of the partition π is split during the refinement process into W' and W'' . This splitting gives the partition π' such that:

$$pos(W', \pi') = pos(W, \pi) \text{ and } k = pos(W'', \pi') = pos(W, \pi) + |W'|.$$

The new position k created by splitting the cell W is a *trace element* of the refinement process. The refinement trace is the sequence of trace elements successively introduced during refinement; it is isomorphism invariant and can be stored into an array. Moreover, let us consider the alternation of individualization and refinement steps which is needed to compute a discrete partition; the whole process has its own trace, since the individualization operation consists of a cell splitting, too. Such trace has length at most n , and each of its elements appears exactly once in it. Note that, being sequences of integers, traces can be ordered, e.g. component-wise.

Assume now that the refinement of $G_1 = (H_1, \pi_1)$ has been computed and $\tau = (\tau_1, \dots, \tau_m)$ is its trace. While computing the refinement of $G_2 = (H_2, \pi_2)$ we can stop as soon as we find a trace element τ'_i different from the corresponding τ_i . This is sufficient to realize that the refinements of G_1 and G_2 are different. Obviously, if we choose an ordering on traces and τ'_i is “better” than τ_i , then the refinement of G_2 will be completed and its trace will be stored for later comparisons.

Multi-refinements are classified by means of their traces, too. In this case, the sequence which contains the new positions created by the splitting cell is initially recorded, and then expanded with the sequence originating from calling the refinement procedure (first statement of the **repeat** loop in Algorithm 1) on the updated partition.

3.1.1 The target cell

A serious motivation for introducing multi-refinements is that they define a family of target cell selectors, each of which is based on information coming from *the next* individualization step.

Let (H, π) be a colored graph. During the construction of its multi-refinement (H, π') , we keep information about the sizes of partitions deriving from refinements of vertex individualizations, and then we choose as target cell the leftmost one in π' which will subsequently produce the partition with the maximal size. This choice is isomorphism invariant. It comes out that multi-refinement allows the cell selector to behave in a *fair* way: a cell is never left unconsidered for being the one from which the next individualizations will come out. This appears as a major property if we want to avoid inefficiencies coming from the wrong choice of the target cell.

3.2 Traversing the search tree

For the sake of readability, we will use a simplified visual representation of a search tree, in which the root is labeled by a partition and any other node is labeled by the vertex of the graph which is individualized at that stage of the computation. Therefore, if a node is labeled by a vertex v , the intended meaning is that (i) v is an element of the target cell of the partition π represented

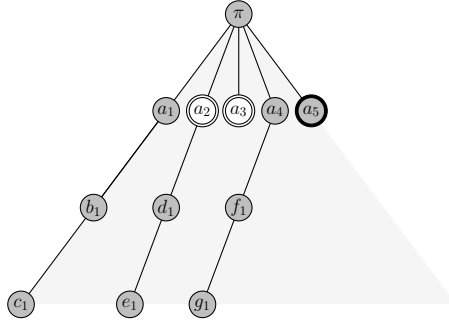


Figure 4: First iteration

by its father; (ii) the node v represents the partition $\pi^{(v)}$, which is obtained by applying the multi-refinement function.

Traces does not perform backtrack on the search tree. The tree will be visited and pruned according to a strategy which can be viewed as an iterated depth-first visit of a forest of AND/OR trees. In such trees, nodes are discriminated between AND nodes and OR nodes. AND nodes are those which require all their children to be visited, while only one child is visited when starting from an OR node. The tree is visited by level iterations; at the i -th iteration, the forest of trees rooted at level i is considered, together with the assumption that the roots of such trees are AND nodes, while all other nodes are OR nodes. The description of such strategy will be now detailed as an abstract example, with the help of some figures.

First iteration: Given the colored graph (H, π_0) and the multi-refinement R , let π be the root of the search tree, where $R(H, \pi_0) = (H, \pi)$. The multi-refinement procedure determines the target cell for π , which we assume here to be $\{a_1, a_2, a_3, a_4, a_5\}$. We start by individualizing a_1 and multi-refining $(H, \pi \downarrow a_1)$, thus obtaining the first child of π . As mentioned above, the label a_1 in the tree is a placeholder for the partition $\pi^{(a_1)}$. Now, we proceed down the tree with the aim of computing a discrete partition. Hence, let b_1 be an element of the target cell of $\pi_1 = \pi^{(a_1)}$ and c_1 an element of the target cell of $\pi_2 = \pi_1^{(b_1)}$.

Let us assume that $\pi_3 = \pi_2^{(c_1)}$ is discrete. By the definition of multi-refinement, all possible individualizations of vertices (except for those belonging to singleton cells in π_2) have been performed, cell by cell, to produce π_3 from $\pi_2 \downarrow c_1$. It may be the case, as we now assume, that a pair of such individualizations determine an automorphism γ_0 of the graph H , as from Algorithm 1. Clearly, such automorphism fixes a_1, b_1 and c_1 , while it moves some other vertices. In particular, assume that $\gamma_0(a_2) = a_3$. This implies that the subtree rooted at a_3 can be pruned from the search tree, since it is isomorphic to the subtree rooted at a_2 .

A path from the root of the search tree to a leaf is identified by the sequence of individualized vertices, and will be called an *attempt*. Therefore, $\langle a_1, b_1, c_1 \rangle$ is an attempt. The discrete partition π_3 induces a *candidate* canonical form, which we store for later use.

We now go back to a_2 and we start a new path toward a leaf. When the new attempt $\langle a_2, d_1, e_1 \rangle$ has been completed, we compare the induced candidate canonical form with the one previously stored. If they are different, we discard one of them according to their lexicographic ordering, otherwise a new automorphism γ_1 has been found, such that $\gamma_1(a_1) = a_2, \gamma_1(b_1) = d_1, \gamma_1(c_1) = e_1$. This implies that the whole subtree rooted at a_2 is isomorphic to the one rooted at a_1 , and it can be discarded.

We now go back to a_4 , we compute the corresponding attempt and we assume that it does

not give any further information. So we consider the final node of the first iteration, a_5 . Here we want to describe the pruning operation which occurs when $\pi^{(a_5)}$ induces a quotient graph different from those already computed at the same level of the tree, say $\pi^{(a_1)}$. This is clearly a node invariant. In this case we prune one of the subtrees, according again to their lexicographic ordering. In the previous figure, we have drawn a black circle around nodes pruned this way, while a white node is intended to be pruned by automorphism discovery.

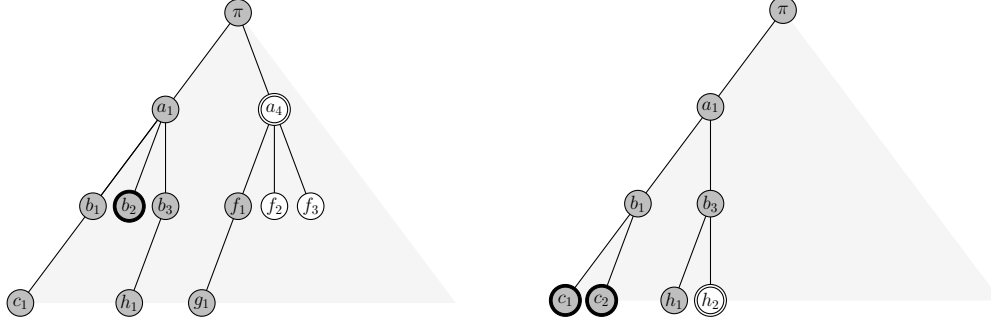


Figure 5: Second iteration (left); final iteration (right)

Second iteration: Due to the pruning performed during the previous iteration, we are left with the nodes a_1 and a_4 to be expanded. So we start from the tree rooted at a_1 and we consider the corresponding target cell. We use the information on the subgroup Γ of the automorphism group of H obtained so far. We compute the orbits of the stabilizer of Γ with respect to a_1 and we consider one representant for each orbit which intersects the target cell. Let b_1, b_2, b_3 the vertices resulting from such filtering. We proceed exactly as in the previous cases, computing the required attempts and collecting the corresponding information. In the present figure, while comparing the candidate canonical forms deriving from the attempts $\langle a_1, b_3, h_1 \rangle$ and $\langle a_4, f_1, g_1 \rangle$ an automorphism γ_2 such that $\gamma_2(a_1) = a_4, \gamma_2(b_3) = f_1, \gamma_2(h_1) = g_1$ has been found, and the tree has been consequently pruned at node a_4 .

Final iteration: We proceed exactly as in the previous iteration, first considering the stabilizer of the subgroup Γ_1 of the automorphism group of H which has already been computed, now with respect to a pair of vertices. In the present figure, the attempts ending in c_1 and c_2 have been discarded by detecting a *better* candidate deriving from the attempt $\langle a_1, b_3, h_1 \rangle$, while an automorphism has been detected which fixes a_1 and b_3 and associates h_1 to h_2 . It comes out that the whole automorphism group of H has been computed, together with its generators, and the canonical form of H is the one induced by the attempt $\langle a_1, b_3, h_1 \rangle$.

Summarizing, the search tree is visited by levels. For every node appearing at some level, that node is either discarded (by automorphism or by a node invariant criterion) or a path from it to a leaf is computed. The remaining candidate is taken as the canonical form of the input graph. As a final remark, we observe that the structure of the visiting strategy hints to the parallel implementation of all attempts originating at the same level.

3.3 A variant: computing the automorphism group

As a final contribution, we describe the algorithm which has been implemented in *Traces* for computing generators of the automorphism group of a graph.

Assume, for the sake of simplicity, that all discrete partitions appear at the same level ℓ in

the search tree associated to the colored graph $G = (H, \pi) \in \mathbb{G}$, as shown in Figure 6.left. The extension to the general case is straightforward.

The algorithm proceeds as in the case of canonical labeling, down to the $(\ell - 1)$ -th level of the search tree. When the $(\ell - 1)$ -th iteration of the algorithm has ended, we are left with the partitions $\pi_1, \pi_2, \dots, \pi_k$ to be the object of vertex individualizations. At this stage of the computation, in order to obtain the automorphism group of the initial graph, we proceed as follows:

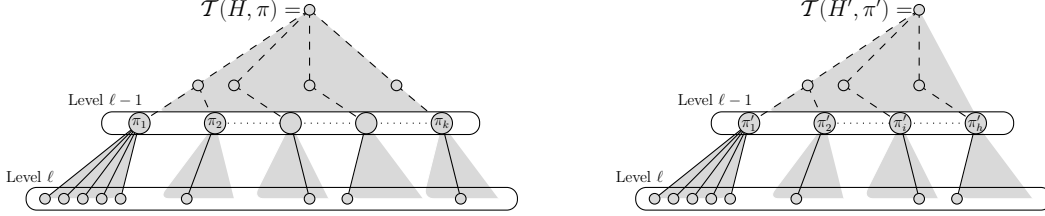


Figure 6: Computing the automorphism group and isomorphism testing

Procedure A. Let $(H, \pi) \in \mathbb{G}$ and let $\pi_1, \dots, \pi_k$ be the roots of subtrees appearing at level $\ell - 1$ in $\mathcal{T}(H, \pi)$, whose leaves are at level ℓ . Let $\Phi \subseteq \text{Aut}(H)$ be the subgroup of the automorphism group of H computed so far.

Step 1 Compute, in the usual way, individualizations of vertices in the target cell of π_1 and store the permutations corresponding to the obtained discrete partitions; update Φ if new generators for $\text{Aut}(H)$ are found;

Step 2 For $i = 2, \dots, k$, individualize only one vertex in the target cell of π_i , then refine the partition; compare the resulting permutation with the stored ones, in search for possible new automorphisms, and then store it on its turn, if no new automorphism is found.

At the end of the process described in Procedure A, the whole automorphism group of the initial graph has been computed.

Proposition 3.4. *Procedure A returns the (generators of the) automorphism group of the graph H .*

Sketch of the proof. Let $V_{\pi_1} = (v_{i_1}, \dots, v_{i_{\ell-1}})$ be the sequence of vertices which have been individualized from the root of the tree down to π_1 ; if a new automorphism γ fixes V_{π_1} , then it is detected during Step 1 of Procedure A. Otherwise, if, for some i , the tree rooted at π_i is isomorphic to the one rooted at π_1 , then the unique leaf computed from π_i is sufficient to determine the mapping between the two trees, adding such mapping to Φ . At the end of Step 2 of Procedure A, all subtrees isomorphic to π are pruned, hence all the elements of $\text{Aut}(H)$ which do not fix V_{π_1} have been generated. $\square$

Permutations stored by the application of Procedure A can be used for isomorphism testing. In effect, suppose that we are given another graph $G' = (H', \pi') \in \mathbb{G}$, as in Figure 6.right. If G and G' are isomorphic, then one of the trees rooted at level $\ell - 1$ in $\mathcal{T}(H', \pi')$, say the one rooted at π'_i in Figure 6, must be isomorphic to the tree rooted at π_1 in $\mathcal{T}(H, \pi)$. Hence the unique permutation computed by individualizing one vertex of H' in π'_i induces one isomorphism between G and G' with at least one of the stored permutation originating from π_1 .

We observe that: (i) the breadth-first structure of the visiting strategy is particularly well-suited for the method described above; (ii) at the cost of storing permutations, GI can be tested

in a more efficient way without computing the automorphism group of the union of the graphs; (iii) the method can be applied at any level of the tree; (iv) the final level of the search tree is often the one where refinement becomes heavy, since all regularities of the initial graphs are broken. As we will see from experimental results, this will make graph isomorphism testing feasible also in cases of very hard graphs.

4 Experimental results

The algorithm presented in the paper is now compared with *nauty* and *bliss*. A comparison with *saucy* can be obtained from our performance tables and those presented in [15]. Graphs are selected from the library of benchmarks which is attached to the *bliss* distribution ([14]). In order to obtain information on sizes of search trees, it has been decided not to time out, whenever reasonably possible, any experiment. As a consequence, only a few graphs have been considered, and, for each of them, only one instance. However, this seems to be sufficient to obtain a clear comparison between the different approaches. Experiments have been carried out on a Apple Mac Pro with 2 Quad Core processors at 2.8 GHz, under gcc 4.0. For each experiment, the following information is reported in Tables 1 and 2: (1) the name of the graph, (2) the number of its vertices and edges, (3) the size of the automorphism group of the graph, (4) the number of its orbits; for *nauty* and *bliss*, the execution time (in seconds) and the size and maximal level of the associated search tree (column Refine (ℓ), considered as the amount of calls of the refinement function). For *Traces*, the following information is reported: (i) the execution time (in seconds), (ii) the amount of calls to the multi-refinement function (which gives the measure of the search space) together with the amount of individualizations needed to compute a discrete partition (which indicates the depth of the search space), (iii) the number of computed generators of the automorphism group, (iv) the time spent in managing the group. In the case of the computation of the automorphism group (without searching for the canonical form), the number of residual permutations needed for isomorphism testing is reported in the rightmost column.

With reference to the classification in the mentioned graph library, we have selected graphs from the following families:

- affine and projective geometries: graphs `ag2-x`, `pg2-32`;
- Cai-Fürer-Immerman construction: graphs `cfi-x`;
- constraint satisfaction problems: graphs `difp-20-0`, `fpga-x-y`, `s3-3-3-3`, `urq8-5`;
- Hadamard matrices: graphs `had-x`, `had-sw-x` (with some switching operations);
- Miyazaki constructions: graphs `mz-x`, `mz-aug-x`, `mz-aug2-x`;
- projective planes: graphs `pp16-x`; taken from [24]: `flag-6`;
- random regular graphs: graphs `rnd-3-reg-x-y`;
- strongly regular graphs: graphs `latin-x`, `latin-sw-x-y`, `lattice-30`, `sts-x`, `sts-sw-x-y`;
- complete graphs: graphs `k-x`;
- grid graphs: graphs `grid-x-y`, `grid-w-x-y`.

We provide two tables of results: in Table 1, graphs having large search trees in *nauty* and *bliss* are considered, while in Table 2 experiments with graphs having small search trees are reported.

Table 1: graphs with large search space. For all the considered graphs, *Traces* exhibits a drastic decrease for the size of their search space, with clear consequences over computation time. It comes out that the hardest instances are graphs with small automorphism group, such as `had-236`. The gain in performance of *Traces* wrt *nauty* and *bliss* is considerable for all graphs in the `pp-16` family, with the addition of `flag-6` (taken from Moorhouse’s library [24]), which

comes from a projective plane of order 27.

The reader can verify the exponential contraction of the search space of *Traces* wrt the ones of *nauty* and *bliss* in the case of Miyazaki’s sequence **mz-aug2**, also observing that timings include group computation.

Concerning the depth of the search space, its contraction is evident in all cases.

In addition, *Traces* seems to have a more stable behavior on different instances of graphs in the same family (the required multi-refinements and computation time being related to the sizes of the input graph and of its automorphism group), and also on different representations of the same graph, as shown by the following Table, where the canonical forms of graphs coming from random permutations of veritces of **pp-16-8**, a projective plane of order 16, are computed.

	<i>bliss (0.35) - can</i>		<i>Traces - can</i>	
	Canon. time	Refinements (ℓ)	Canon. time	Multi-refs (ind)
pp-16-8	197.71	16589102 (5)	0.42	139 (3)
perm ₁	3663.95	311919402 (5)	0.44	162 (3)
perm ₂	1765.20	150066473 (5)	0.40	137 (3)
perm ₃	8183.51	704831435 (5)	0.50	167 (3)
perm ₄	2938.24	254399812 (5)	0.45	155 (3)
perm ₅	5360.36	456661795 (5)	0.53	169 (3)

It comes out that *Traces* has a stronger ability of capturing the structure of the graph, thus abstracting from its representation. A further evidence of such claim can be also deduced from the series cfi-x, where the depth of *Traces*’ search space is equal to the main parameter introduced by Cai,Fürer and Immerman in their construction [7].

Table 2: graphs with small search space. Graphs exhibiting a small search space (wrt the size of their vertex set) come out to have either a large automorphism group or a trivial one. In the first case, the search space is massively pruned by automorphisms, in the second case just a few individualization steps are needed to obtain discrete partitions. These are the most favorable situations for the individualization-refinement technique. Still *Traces* is able to reduce both the depth and size of search space. However, it is clear that the overhead determined by multiple refinements causes a (sometimes considerable) loss of performance. The most critical experiments for *Traces* are very sparse graphs (s3-3-3-3 and grid graphs): we observe that, in such graphs, partitions induced by simple refinement are equal to those deriving from multi-refinement, and this happens for every individualization step. Therefore multi-refinements are not able to get any additional information. As expected, in these cases, the ratio between the execution time of *Traces* and *nauty* (or *bliss*) can reach the number of vertices of the input graph. Comparing these results, however, we must notice that *Traces*, beyond representing graphs by means of adjacency lists, does not implement any other technique for handling large and sparse graphs, yet.

Table 2 shows that the time spent in group computation becomes significant when dealing with very large automorphism groups: this is evident in the case of complete graphs.

Graph	(V,E)	Aut	Orb	<i>nauty (2.2) - aut</i>		<i>bliss (0.35) - can</i>		<i>bliss (0.35) - aut</i>		<i>Traces - can</i>				<i>Traces - aut</i>			
				Time	Refine (ℓ)	Time	Refine (ℓ)	Time	Refine	Time	MRef (ind)	Gns	Grp	Time	MRef	Grp	Rsd
had-52	(208, 5512)	$2^4 \cdot 13$	2	10.73	190034 (5)	0.50	14536 (4)	0.50	15533	0.26	287 (2)	5	0.02	0.15	128	0.01	55
had-100	(400, 20200)	$2^4 \cdot 5^2$	2	185.00	1348634 (5)	4.23	52819 (4)	4.43	58613	3.20	725 (2)	5	0.04	1.83	321	0.03	103
had-184	(736, 68080)	$2^6 \cdot 23$	2	8544.87	4287786 (6)	33.34	111862 (5)	34.96	125285	10.13	778 (2)	7	0.12	6.11	356	0.08	143
had-232	(928, 108112)	$2^6 \cdot 29$	2	29352.07	8592888 (6)	80.48	183720 (5)	84.51	199679	26.41	968 (2)	7	0.21	14.99	438	0.04	179
had-236	(944, 111864)	2	472	--	Timed out	23322.51	104043906 (3)	23150.37	104043906	7599.66	222787 (2)	1	16.99	103.36	1888	0.16	941
had-sw-32-1	(128, 2112)	2^2	42	36.53	1149410 (5)	6.06	192369 (4)	4.64	141832	0.59	2251 (2)	2	0.05	0.08	168	0.02	81
had-sw-88	(352, 15664)	2^2	132	17633.55	80502284 (6)	309.90	3173883 (3)	322.61	3645512	40.90	19452 (2)	2	0.71	2.53	663	0.01	305
had-sw-112	(448, 25312)	2	132	--	Timed out	939.28	10990338 (3)	925.85	10990338	240.79	50179 (2)	1	1.42	7.12	896	0.01	445
mz-aug2-18	(432, 684)	2^{38}	252	106.08	5374331 (38)	26.30	1048954 (37)	22.64	1048954	1.21	145 (19)	38	0.41	1.22	145	0.50	2
mz-aug2-20	(480, 760)	2^{42}	280	525.01	23593421 (42)	116.30	4194764 (41)	110.14	4194764	1.51	161 (21)	42	0.62	1.50	161	0.61	2
mz-aug2-22	(528, 836)	2^{46}	308	2500.61	102760999 (46)	515.66	16777766 (45)	439.06	16777766	2.10	177 (23)	46	0.84	2.06	177	0.80	2
mz-aug2-30	(720, 1140)	2^{62}	420	--	--	--	--	--	--	5.48	241 (31)	62	2.24	5.47	241	2.25	2
mz-aug2-50	(1200, 1900)	2^{102}	420	--	--	--	--	--	--	25.53	401 (51)	102	9.39	25.44	401	9.32	2
pp-16-1	(546, 4641)	$> 3.42e10$	1	0.06	144 (6)	0.02	133 (5)	0.02	144	0.09	16 (4)	6	0.02	0.09	16	0.03	1
pp-16-2	(546, 4641)	$2^8 \cdot 3 \cdot 5$	10	42288.08	80597650 (5)	23886.33	1994354150 (5)	1868.28	80597650	50.74	11907 (3)	5	1.54	2.51	646	0.09	223
pp-16-4	(546, 4641)	$2^{12} \cdot 3$	6	5267.15	10311534 (5)	3624.68	301374561 (5)	282.26	10311534	15.78	3877 (3)	3	0.55	2.77	622	0.07	311
pp-16-6	(546, 4641)	$2^{11} \cdot 3^2$	5	--	Timed out	17769.12	901487681 (5)	18438.75	968486421	19.94	4864 (3)	5	0.97	0.96	304	0.06	84
pp-16-7	(546, 4641)	$2^{14} \cdot 3^2$	3	--	Timed out	370.87	16177794 (5)	4662.65	210159039	1.63	402 (3)	8	0.19	0.38	106	0.04	24
pp-16-8	(546, 4641)	$2^{15} \cdot 3^3$	3	683.93	1706149 (5)	197.71	16589102 (5)	23.58	1170686	0.42	139 (3)	8	0.10	0.22	70	0.05	14
pp-16-9	(546, 4641)	$2^{12} \cdot 3^2 \cdot 5^2$	6	15598.57	35144658 (5)	3575.12	303816170 (5)	825.15	35107649	0.39	187 (3)	4	0.07	0.24	118	0.04	32
pp-16-11	(546, 4641)	$2^{12} \cdot 3^2 \cdot 7$	6	--	Timed out	916.16	45141041 (5)	4276.61	219395299	1.07	379 (3)	6	0.15	0.35	132	0.02	32
pp-16-15	(546, 4641)	$2^{11} \cdot 3^3$	8	--	Timed out	1929.39	145623212 (5)	3515.83	278419116	3.88	1092 (3)	6	0.18	0.46	193	0.05	70
pp-16-17	(546, 4641)	$2^{11} \cdot 3^2 \cdot 5$	8	7032.42	14074851 (5)	2576.56	216934489 (5)	343.41	14074851	2.37	691 (3)	7	0.18	0.46	193	0.05	55
pp-16-19	(546, 4641)	$2^8 \cdot 3^2$	14	--	Timed out	8268.57	666219267 (5)	3792.12	130609514	78.80	18877 (3)	5	2.93	3.50	858	0.15	355
pp-16-21	(546, 4641)	$2^7 \cdot 3^3$	12	--	Timed out	10249.02	617020245 (5)	25871.22	1622520018	53.41	12895 (3)	4	1.71	2.79	681	0.14	300
flag-6	(1514, 21196)	$2^3 \cdot 3^7 \cdot 7$	4	--	Timed out	16396.88	749371122 (5)	26665.97	706556032	584.45	12304 (3)	7	5.85	40.45	1385	0.68	67
sts-67	(737, 35376)	3	253	8.91	23841 (3)	8.04	157566 (2)	7.77	157566	1.67	255 (1)	1	0.02	2.12	255	0.01	253
sts-sw-21-10	(70, 945)	1	70	0.03	1961 (3)	0.03	3011 (2)	0.03	3011	0.00	71 (0)	0	-	0.00	71	-	70
sts-sw-55-1	(495, 19305)	1	495	7.76	39106 (3)	6.72	206416 (2)	6.57	206416	1.75	496 (1)	0	-	2.12	496	-	495
sts-sw-79-11	(1027, 58539)	1	1027	73.09	118106 (3)	50.74	937652 (2)	49.80	937652	17.01	1028 (1)	0	-	19.03	1028	-	1027

Table 1: Graphs with large search tree

Graph	(V,E)	Aut	Orb	<i>nauty (2.2) - can</i>		<i>bliss (0.35) - can</i>		<i>Traces - can</i>			
				Time	Refine (ℓ)	Time	Refine (ℓ)	Time	MRef (ind)	Gns	Grp
ag2-16	(528,4352)	$2^{14} \cdot 3^2 \cdot 5^2 \cdot 17$	2	0.03	82 (5)	0.02	100 (4)	0.08	12 (3)	6	0.02
ag2-49	(4851,120050)	$2^{10} \cdot 3^2 \cdot 5^2 \cdot 7^6$	2	1.58	52 (5)	0.48	51 (4)	44.63	12 (3)	5	0.14
cfi-20	(200, 300)	2^{11}	80	0.03	146 (10)	0.01	262 (9)	0.03	28 (5)	11	0.01
cfi-80	(800, 1200)	2^{41}	320	3.81	1125 (36)	0.26	2802 (36)	3.05	118 (20)	41	1.19
cfi-200	(2000, 3000)	2^{101}	800	117.07	5597 (90)	5.30	33893 (92)	67.65	298 (50)	101	37.13
difp-20-0	(8965,23082)	1	8965	0.02	1 (1)	0.01	1 (0)	0.61	1 (0)	0	-
fpga-10-8	(688,1320)	$2^{23} \cdot 3$	519	0.05	300 (24)	0.01	300 (23)	0.52	71 (16)	21	0.16
fpga-13-11	(1500,3125)	$2^{32} \cdot 3^7$	1116	0.39	780 (39)	0.02	39 (38)	4.09	112 (26)	31	1.27
grid-3-20	(8000,22800)	$2^4 \cdot 3$	220	2.27	5 (2)	0.05	5 (1)	49.49	1 (0)	3	0.08
grid-w-2-100	(10000,20000)	$2^7 \cdot 5^4$	1	18.33	7 (3)	0.09	8 (2)	850.35	3 (1)	5	0.23
grid-w-3-20	(8000,24000)	$2^{10} \cdot 3 \cdot 5^3$	1	4.22	8 (3)	0.08	8 (2)	144.29	3 (1)	6	0.25
k-70	(70,2415)	$> 1.97e100$	1	0.01	2845 (70)	0.02	2485 (69)	3.08	148 (68)	8	3.04
k-100	(100,4950)	$> 9.33e157$	1	0.01	5050 (100)	0.05	5050 (99)	26.33	208 (98)	8	26.25
latin-30	(900,39150)	$2^6 \cdot 3^3 \cdot 5^2$	1	0.17	60 (5)	0.18	99 (3)	0.27	3 (1)	5	0.02
latin-sw-21-8	(441,13230)	1	441	5.44	26902 (3)	6.43	168022 (2)	1.23	442 (1)	0	-
latin-sw-30-11	(900,39150)	1	900	49.79	79255 (4)	46.32	731701 (2)	12.43	901 (1)	0	-
lattice-30	(900,26100)	$> 1.40e65$	1	0.30	930 (31)	0.40	901 (30)	9.90	122 (28)	33	8.18
mz-18	(360, 540)	2^{39}	90	0.20	722 (21)	0.01	631 (20)	0.64	76 (18)	24	0.18
mz-50	(1000, 1500)	2^{103}	250	> 24000	Timed out ^(*)	0.30	8653 (52)	24.76	204 (50)	56	8.09
mz-aug-22	(440, 1012)	2^{47}	110	0.24	845 (25)	0.03	778 (24)	1.46	139 (23)	28	0.60
mz-aug-50	(1000, 2300)	2^{103}	250	> 24000	Timed out ^(**)	> 24000	Timed out ^(***)	24.51	307 (51)	56	14.32
paley-461	(461,53015)	$2 \cdot 5 \cdot 23 \cdot 461$	1	0.01	6 (3)	0.07	6 (2)	0.52	3 (1)	2	0.00
pg2-32	(2114,34881)	$> 1.09e13$	1	4.70	912 (6)	0.24	858 (5)	1.10	14 (6)	6	0.13
rnd-3-reg-3000-1	(3000,4500)	1	3000	328.57	3001 (2)	0.39	3001 (1)	0.31	1 (0)	0	-
rnd-3-reg-10000-1	(10000,15000)	1	10000	42821.01	10001 (2)	5.60	10001 (1)	4.24	1 (0)	0	-
s3-3-3-3	(11076,20218)	2^{12}	7836	130.06	91 (13)	0.10	91 (12)	2053.71	43 (11)	12	1.28
urq8-5	(3906,20331)	1	3906	0.00	1 (1)	0.01	1 (0)	0.18	1 (0)	0	-

^(*)9.68 secs, 3249 (52) nodes in *nauty-aut*; ^(**)3.34 secs, 3004 (53) nodes in *nauty-aut*; ^(***)0.14 secs, 3005 (53) nodes in *bliss-aut*;

Table 2: Graphs with small search tree

5 Concluding remarks and further work

Starting from a critical investigation of the individualization-refinement technique for canonical labeling of graphs, a new algorithm has been presented with the aim of reducing the associated search space. The main novelties of the proposed method can be found (i) in the refinement mechanism, (ii) in the choice of individualization steps, (iii) in the procedure for computing the automorphism group of a graph, (iv) in the possibility of comparing refinements without computing them completely.

Experimental results have been provided showing a significant improvement of performances in the case of graphs of combinatorial origin which are considered as critical for any algorithm adopting the individualization-refinement method. The comparison between tables of results presented in the paper leaves an interesting scenario and several directions for further work. In effect, the new approach and the state of the art ones are in some sense complementary, which hints to their possible integration. As an example, *Traces* and *nauty* (or *bliss*) could exchange information about detected automorphism of the input graph in order to obtain the best performances from one another.

At the implementation level, *Traces* is still at an initial stage; some engineering work should be done in the same spirit of *bliss* wrt *nauty*, with a special attention to the multi-refinement procedure and to its possible parallel implementation.

From a theoretical standpoint, the main achievement of this paper is that *Traces* does not have an exponential behavior on any of the benchmark families of graphs considered in the literature for the individualization-refinement method. In our opinion, this is due to a better choice of the target cell and to the ability of decreasing the depth of the search space; it is our intention to investigate further such aspects of the proposed algorithm.

Acknowledgments

I would like to thank my friends and colleagues Maurizio Bonuccelli, Angelo Monti and Riccardo Silvestri for their suggestions and discussions about the topics of this paper.

References

- [1] Vikraman Arvind and Jacobo Torán. Isomorphism testing: Perspective and open problems. *Bulletin of the EATCS*, 86:66–84, 2005.
- [2] László Babai. Monte Carlo algorithms in graph isomorphism testing. Technical Report 79-10, Dép. Math. et Stat., Univ. de Montréal, 1979.
- [3] László Babai. Moderately exponential bound for graph isomorphism. In *FCT*, pages 34–50, 1981.
- [4] László Babai. Automorphism groups, isomorphism, reconstruction. In *Handbook of combinatorics (vol. 2)*, pages 1447–1540. MIT Press, Cambridge, MA, USA, 1995.
- [5] László Babai, D. Yu. Grigoryev, and David M. Mount. Isomorphism of graphs with bounded eigenvalue multiplicity. In *STOC*, pages 310–324, 1982.
- [6] László Babai and Eugene M. Luks. Canonical labeling of graphs. In *STOC*, pages 171–183, 1983.

- [7] Jin-yi Cai, Martin Fürer, and Neil Immerman. An optimal lower bound on the number of variables for graph identifications. *Combinatorica*, 12(4):389–410, 1992.
- [8] Paul T. Darga, Mark H. Liffiton, Karem A. Sakallah, and Igor L. Markov. *saucy 1.1*, available at <http://vlsicad.eecs.umich.edu/BK/SAUCY/>.
- [9] Paul T. Darga, Mark H. Liffiton, Karem A. Sakallah, and Igor L. Markov. Exploiting structure in symmetry detection for CNF. In *DAC*, pages 530–534, 2004.
- [10] I. S. Filotti and Jack N. Mayer. A polynomial-time algorithm for determining the isomorphism of graphs of fixed genus (working paper). In *STOC*, pages 236–243, 1980.
- [11] GAP. System for computational discrete algebra: <http://www-gap.dcs.st-and.ac.uk>.
- [12] John E. Hopcroft and Robert Endre Tarjan. A $v \log v$ algorithm for isomorphism of triconnected planar graphs. *J. Comput. Syst. Sci.*, 7(3):323–331, 1973.
- [13] John E. Hopcroft and J. K. Wong. Linear time algorithm for isomorphism of planar graphs (preliminary report). In *STOC*, pages 172–184, 1974.
- [14] Tommi A. Junttila and Petteri Kaski. *bliss 0.35*, available at <http://www.tcs.hut.fi/Software/benchmarks/ALENEX-2007/>.
- [15] Tommi A. Junttila and Petteri Kaski. Engineering an efficient canonical labeling tool for large and sparse graphs. In *ALENEX*, 2007.
- [16] William Kocay. On writing isomorphism programs. In *Computational and Constructive Design Theory*, pages 135–175, 1996.
- [17] Jeffrey S. Leon. *Partition backtrack programs*, available at <ftp.math.uic.edu/pub/leon/partn>.
- [18] Eugene M. Luks. Isomorphism of graphs of bounded valence can be tested in polynomial time. *J. Comput. Syst. Sci.*, 25(1):42–65, 1982.
- [19] MAGMA. Computational algebra system: <http://magma.maths.usyd.edu.au/magma>.
- [20] Rudolf Mathon. A note on the graph isomorphism counting problem. *Inf. Process. Lett.*, 8(3):131–132, 1979.
- [21] Brendan D. McKay. *nauty 2.2*, available at <http://cs.anu.edu.au/~bdm/nauty>.
- [22] Brendan D. McKay. Practical graph isomorphism. *Congr. Numer*, 30:45–87, 1981.
- [23] Takunari Miyazaki. The complexity of mckay’s canonical labeling algorithm. In *Groups and Computation II, DIMACS Series on Discrete Mathematics and Theoretical Computer Science*, pages 239–256, 1997.
- [24] G. Eric Moorhouse. *Projective Planes*, available at <http://www.uwo.edu/moorhouse/pub/>.
- [25] Gordon Royle. *Projective Planes Of Order 16*, available at <http://people.csse.uwa.edu.au/gordon/data.html>.
- [26] Uwe Schöning. Graph isomorphism is in the low hierarchy. *J. Comput. Syst. Sci.*, 37(3):312–323, 1988.

- [27] Ákos Seress. *Permutation group algorithms*, volume 152 of *Cambridge Tracts in Mathematics*. Cambridge University Press, Cambridge, 2003.
- [28] Charles C. Sims. Computation with permutation groups. In *SYMSAC '71: Proceedings of the second ACM symposium on Symbolic and algebraic manipulation*, pages 23–28. ACM, 1971.
- [29] Neil J.A. Sloane. *A Library of Hadamard Matrices*, available at <http://www.research.att.com/~njas/>.